

SEE WHAT
GLASS
CAN DO
GGI

Anti-Slip Acid Etched Glass Flooring



Features & Benefits

- The patterns are etched directly into the glass, not added or bonded
- Consistent finish and appearance
- The patterns do not degrade or wear down over time
- Deep etching creates non-slip surface
- Scratch resistant
- Resistant to marks and stains, and easy to clean



General Characteristics

Glass type	Low-Iron
Thickness	3/8"
Sheet size	88 1/2 x126"
Cutting	Yes
Polishing	Yes
Beveling	Yes
Bending	Yes
Tempering	Yes
Laminating	Yes
Edgework	Yes
Product Availability	Custom fabrication or case quantities

Diamond Plate

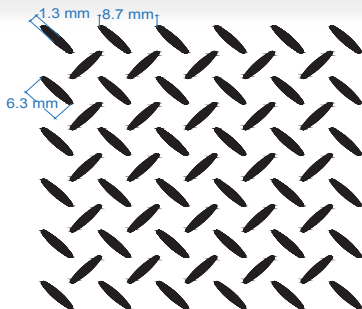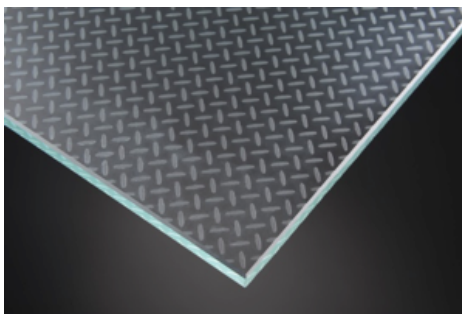

Dots

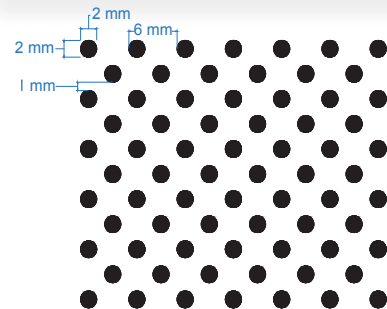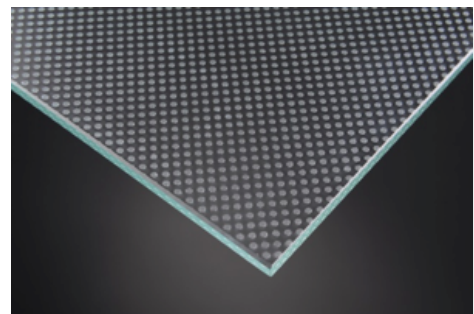

For more information please contact marketing@generalglass.com.

Standards & Ratings

Per DIN 51 130 (2010) Standards the flooring glass is suitable for use in; Parking Areas R10, Outside Traffic Paths R10, Entrance Areas and Stairs Indoor R09, Entrance Areas and Stairs Outdoor R10, Sanitary Areas R09

Dot - R11 / R10

Diamond Plate - R11 / R09

Abrasion Resistance

Per EN 13748-2 Standard, abrasion resistance values below 1.22in³/3.05in³ for floor tiles is required.

Fabrication

Cutting - score the unetched side of the glass. Mirrors and glass in which both sides are etched, score the etched side but increase cutting pressure. Ensure cutting pressure is tested prior to cutting. After cutting the sheets should be washed to avoid staining from the oil.

Machine edging - wet the glass before fabrication and wash immediately after fabrication. Never allow coolant or cerium oxide to dry on the glass as it may permanently stain.

Storage

Glass should be stored vertically in a cool, dry and well ventilated area. If moisture or humidity is detected, separate sheets and dry immediately.

Handling and Care

The etched glass can stain easily. Avoid contact with materials such as silicone adhesives, mastics, black felt markers, wax markers, oil and grease.

Use a mild, non-abrasive solution and apply uniformly to the glass surface with a soft cloth. Immediately dry the glass surface with a lint free cloth.

Limited Warranty

GGI warrants to its customers, who shall in turn be able to pass on said warranty to its customers, clients, or purchasers that the products supplied shall meet or exceed ASTM standards and be free from workmanship defects for a period of five (5) years from the date of shipment provided that the materials have been stored, handled, installed and maintained according to GGI's instructions and recommendations. For complete warranty please contact GGI.

SEE WHAT
GLASS
CAN DO
GGI