


SEE WHAT
GLASS
CAN DO
GGI

Satin Mirror

Features & Benefits

- Creates a soft reflection, with a surface that is mirror-bright yet produces the diffusion effect of a satin finish.
- The etched surface is scratch and fingerprint resistant

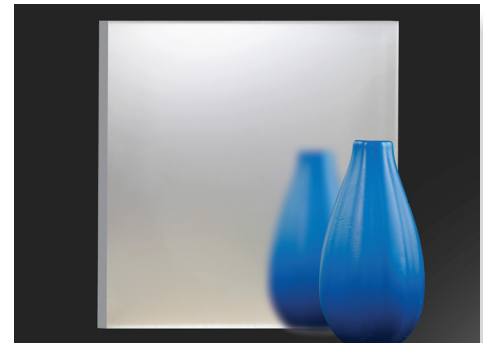

Product Details

Glass Type	Low iron
Sheet Size	88 ½ x 126"
Thickness	1/4"
Product Availability	Cut to size or case quantities

Fabrication

Cutting	Yes
Polishing	Yes
Drilling and notching	Yes
Beveling	Yes
Bending	No
Tempering	No
Laminating	EVA 70°

For more information contact marketing@generalglass.com.

Product Guidelines

Fabrication

CUTTING

Any lubricant used for the cutting of the mirror must be immediately removed from the back of the mirror, as it can dissolve and damage the mirror's protective coating. It is advisable to use a lubricant made from vegetable based white mineral oil, such as ENOTAP Fenzi. In case of a handmade cut, it is sufficient to use a simple glasscutter. Do not, under any circumstances sprinkle oil or other substances on the part to be cut.

Installation

Satin Mirror can be installed using any quality mirror mastic that is nonacidic, or neutral silicone non-acetic. Ideal application is in parallel stripes, to facilitate the drying process.

Care

Use a clean soft cloth and regular product for cleaning mirrors. Please Note: The excessive use of cutting oils may alter the protective coat of the paint at the back of the mirror. We recommend washing the mirror immediately after cutting, and using paper interleaving.

Limited Warranty

GGI warrants to its customers, who shall in turn be able to pass on said warranty to its customers, clients, or purchasers that the products supplied shall meet or exceed ASTM standards and be free from workmanship defects for a period of five (5) years from the date of shipment provided that the materials have been stored, handled, installed and maintained according to GGI's instructions and recommendations. For complete warranty please contact GGI.